



FIELD ADJUSTABLE, PRESSURE INDEPENDENT FLOW-LIMITING VALVES FOR SMALL COILS.



A unique field adjustable cartridge allows you to select the exact flows required for your application, maintaining the set flow rate despite fluctuating system pressure. Small and compact for tight spaces, the valves feature an integrated P/T port with space saving "T" handle (optional P/T port provided for flow verification).

Low Flow Circuit Sentry:

Designed to control flows independent of fluctuating system pressures. Features:



- Pressure independent: not affected by changes in the system pressure
- Field adjustable flow rates between 0.25 GPM – 3.8 GPM
- Flow accuracy of +/- 5% of flow setting.
- Removable flow cartridge for easy adjustment and cleaning
- Union-ended tail pieces for quick installation



Low Flow Wye Strainer:

Designed to catch particulate that can settle in the coil and affect the heat transfer efficiency. Features:

- Drain valve with hose fitting for easy cleaning
- Union-ended tail pieces for quick installation
- Removable Stainless Steel mesh strainer for easy cleaning or replacement
- Bypass Option for 3-way control valves

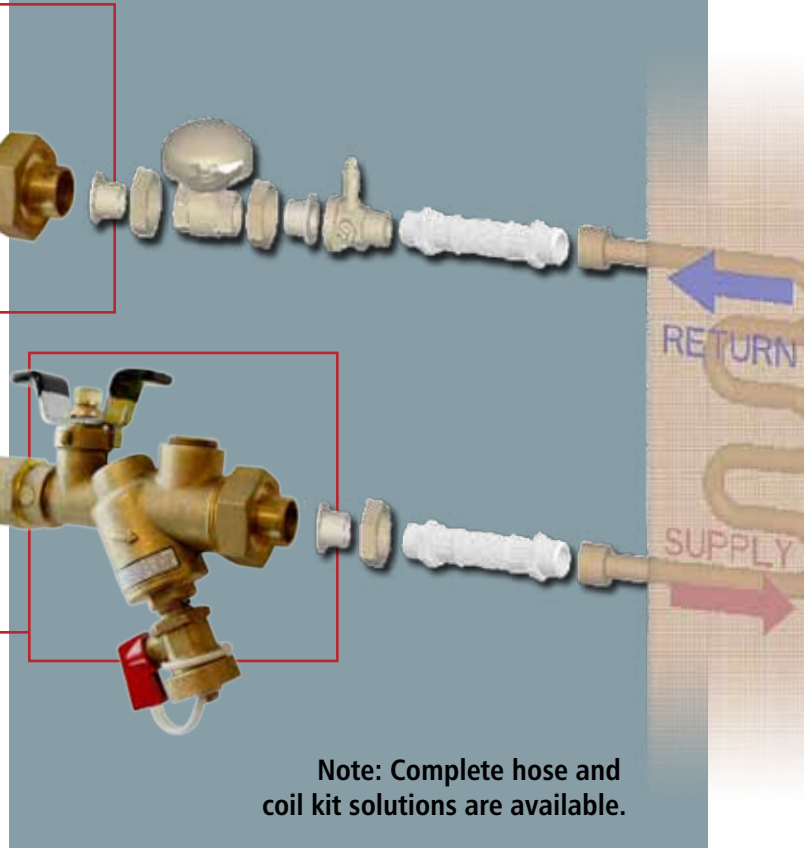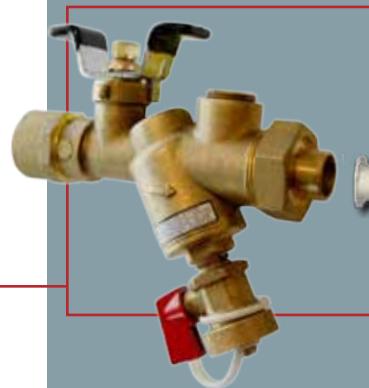

Note: Complete hose and coil kit solutions are available.



ITT

Engineered for life


Fully Field Adjustable Flow Cartridge

The ACL, Low Flow Circuit Sentry™ valve comes with a fully adjustable flow cartridge that can easily be set to the desired flow. The flow range for the cartridge has a flow range of 0.25 GPM - 3.8 GPM. Once the cartridge has been set, simply re-insert the cartridge into the valve body and tighten the valve housing cap.


Easy to read, adjustable dial.

Spring loaded cartridge assembly with rolling seal maintains flow between 2 - 60 PSI with quiet operation.

Large openings allow small particles to pass through easily. The result is trouble free operation.

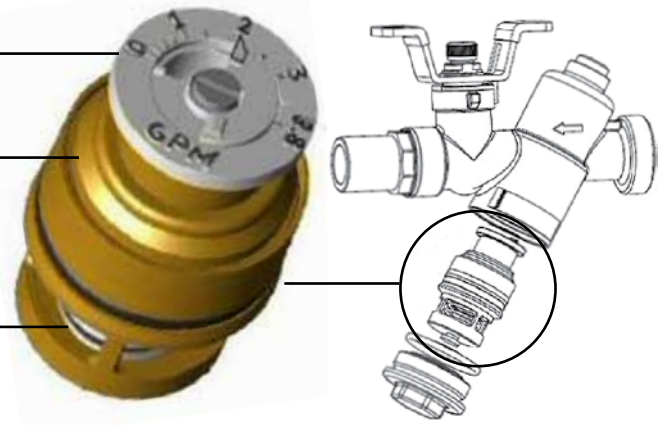

Dimensional Information for Low Flow Circuit Sentry (ACL)

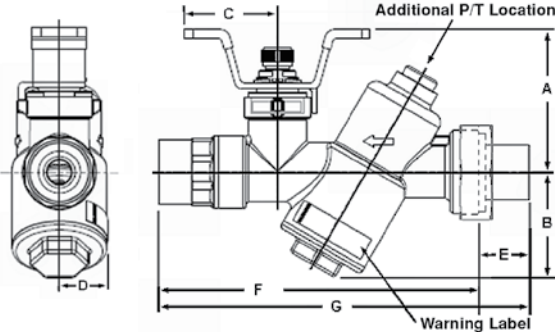

Body: Brass C37700

Ball: Chrome plated Brass C38500

Handle: Chrome Plated Steel w/ Black Vinyl Tip Covers

Cartridge: DZR Brass C35330

O-Rings: EPDM

Maximum Working Pressure: 400 PSI (2758 kPa)

Maximum Working Temperature: 250°F (121°C)

Flow Range: 0.25 GPM (0.015 l/s) – 3.8 GPM (0.24 l/s)


Control Range: Min: See Submittal Max: 60 PSID (414 kPa)

Accuracy: +/- 5% up to 50 PSID, +/- 10% between 50 and 60 PSID

P/T Ports: Two; one in handle, one loose in box.

Part Number	Valve Fixed End	Valve Union End	DIMENSIONS in (mm)							Approx Weight lbs. (kg)
			A	B	C	D	E	F	G	
117437	1/2" SWTF	1/2" SWTF	2.2 (55)	1.6 (41)	1.4 (36)	0.7 (18)	0.6 (15)	5.1 (129)	5.7 (145)	1.4 (0.65)
	3/4" SWTM	1/2" SWTF	2.2 (55)	1.6 (41)	1.4 (36)	0.7 (18)	0.6 (15)	5.1 (129)	5.7 (145)	1.4 (0.65)
117438	3/4" SWTF	3/4" SWTF	2.2 (55)	1.6 (41)	1.4 (36)	0.7 (18)	0.8 (20)	4.8 (122)	5.6 (142)	1.4 (0.65)
117439	3/4" NPTF	3/4" SWTF	2.2 (55)	1.6 (41)	1.4 (36)	0.7 (18)	0.8 (20)	4.9 (125)	5.7 (145)	1.4 (0.65)

Dimensional Information for Low Flow Wye Strainer (UBYL)

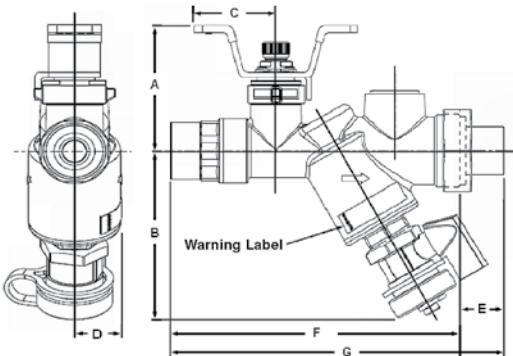

Body: Brass C37700

Ball: Chrome plated Brass C38500

Handle: Chrome Plated Steel w/ Black Vinyl Tip Covers

Strainer: Removable, 30 mesh; 321 Stainless Steel

O-rings: EPDM

Maximum Working Pressure: 400 PSI (2758 kPa)

Maximum Working Temperature: 250°F (121°C)

Part Number	Valve Fixed End	Valve Union End	DIMENSIONS in (mm)							Approx Weight lbs. (kg)
			A	B	C	D	E	F	G	
117440	1/2" SWTF	1/2" SWTF	2.2 (55)	2.9 (73)	1.4 (36)	0.7 (18)	0.6 (15)	5.2 (132)	5.8 (147)	1.55 (0.70)
	3/4" SWTM	1/2" SWTF	2.2 (55)	2.9 (73)	1.4 (36)	0.7 (18)	0.6 (15)	5.2 (132)	5.8 (147)	1.55 (0.70)
117441	3/4" SWTF	3/4" SWTF	2.2 (55)	2.9 (73)	1.4 (36)	0.7 (18)	0.8 (20)	4.9 (125)	5.7 (145)	1.55 (0.70)
117442	3/4" NPTF	3/4" SWTF	2.2 (55)	2.9 (73)	1.4 (36)	0.7 (18)	0.8 (20)	5.0 (127)	5.8 (147)	1.55 (0.70)

ITT
 8200 N. Austin Avenue
 Morton Grove, Illinois 60053
 Phone: (847) 966-3700
 Fax: (847) 966-9052
www.balancevalves.com



Engineered for life